



Our single-use 3-ply face masks are designed to protect both the user and the surrounding environment by capturing expelled contaminants in its lightweight and disposable material.

Available in ASTM F-2100 Level 1, 2, 3, and Hypoallergenic Level 3.



## Three layers of protection

### Inner soft layer

Absorbent non-woven layer

### Nose clip

To ensure a tight seal

### Middle layer


Melt blown non-woven high-density filter

### Outer layer

Hydrophobic non-woven layer

### Elastic ear loops

For comfort fitting

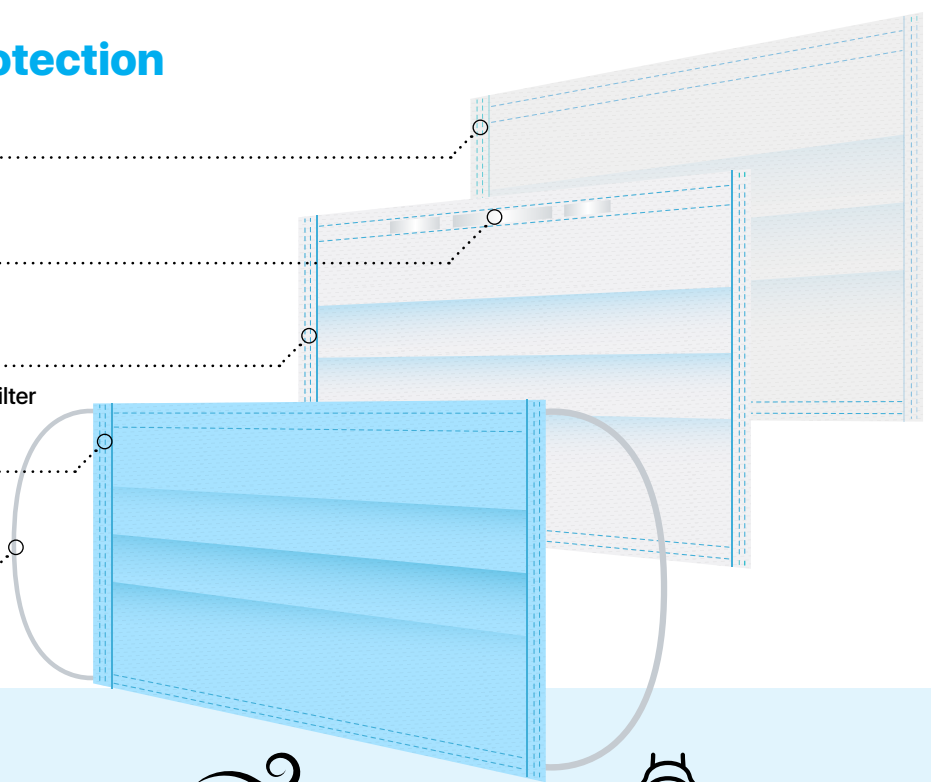

### Made for comfort

Loose fitting with elastic ear loops



### Lightweight

Easy to breathe through



### Nose clip wire

Bendable, shape to fit

Technical specifications	Level 1	Level 2	Level 3	Standard
Bacterial filtration efficiency (BFE%)	≥95%	≥98%	≥98%	ASTM F2101
Particle filtration efficiency (PFE%)	≥95%	≥98%	≥98%	ASTM F2299
Differential pressure ( $\Delta p$ mm H <sub>2</sub> O/cm <sup>2</sup> )	<5.0	<6.0	<6.0	EN 14683 Annex C
Splash resistance (mmHg)	80	120	160	ASTM F1862
Flame spread	Class 1	Class 1	Class 1	16 CFR Part 1610

### Dimensions

Length 175 +/- 5mm  
Width 95 +/- 5mm

ASTM F-2100 Level 1 **SL1P1710**  
ASTM F-2100 Level 2 **SL2P1710**  
ASTM F-2100 Level 3 **SL3P1710**

Hypoallergenic  
ASTM F-2100 Level 3 **SL3P1710H**



Manufactured in Canada by Precision ADM Inc. Distributed by PADM Medical. Unit A - 1595 Buffalo Place, Winnipeg, MB, Canada R3T 1L9 +1 855 593 2729  
www.padmmedical.com info@padmmedical.com

